Equipment spec sheet

Model:	**Ecolift Low Level Access 2.2m**
Category:	Low level access

Working height:	4.20m
Stowed height:	1.94m
Width:	0.70m
Lifting capacity:	150kg
Weight:	305kg
Power:	Manual

Standard features

- Step directly into the platform, no climbing required
- Intuitive to operate - turn the handle to elevate
- Patented lift mechanism, no power required
- 'Auto-lok' brake on elevation
- Lightweight, easy to manoeuvre
- Small footprint
- Unlimited lift cycles, can be used 24/7
- Robust design for years of trouble free service
- Minimal operational costs, virtually maintenance free

Ecolift Low Level Access 2.2m

Model: **Ecolift Low Level Access 2.2m**

Category: Low level access

Dimensions		
A	**Work height**	4,20m
B	**Platform height**	2.20m
C	**Basket Dimensions**	850mm x 644mm
D	**Working Footprint**	1.28m x 0.70m
E	**Length**	1.28m
F	**Width**	0.70m
G	**Height**	1.94m

Specifications	
Lifting Capacity	0.51m
Maximum Manual Force	6cm
Maximum Gradient for Operation	1.05m
Maximum Wind Force	820kg
Maximum Wheel Force	25%
Maximum Castor Point Load	0.35m
Sound Pressure Level	25 sec
Weight	18 sec
Lift Cycles	3.0 km/h

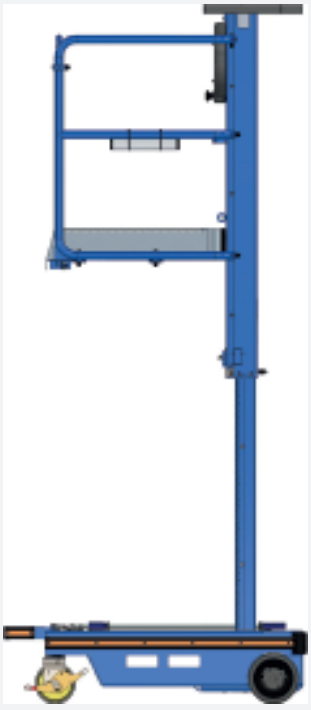

Special features

- The Ecolift can reach the working height of 4.20m in just 15 seconds
- It's easy, fast and efficient to use and is manually powered. The platform has no batteries to charge and works by turning the handle
- The Ecolift is much safer than more traditional methods such as climbing steps or podiums that can clause slips and trips to both the user and those around them

AWS Nationwide Nationwide House 2 Frankton Way, Gosport Hampshire PO12 1FR
02392 604 351 **sales@awsnationwide.com** **awsnationwide.com**